Artemide

PRODUCT DATA SHEET

Chocolate Floor Fluo

Floor lamp with direct-indirect lighting using 4x24W, 6x24W T16 and 2x55W TC-LEL. Optical unit and pole made of aluminum. Steel base. 2 colour options: mocha and white. Optics made of transparent polycarbonate + a PRISMOPTIC diffuser. Light output ratio of up to 77%. Light distribution: 34% direct and 66% indirect (T16), 32% direct and 68% indirect (TC-LEL). Polycarbonate dust protection cover to be ordered separately. 4 electronic light management options: electronic ballast with power switch, dimming control with manual light intensity adjustment, movement detection with time-delayed off control, and INTERACTIVE-DALI system combining a movement detector and a daylight sensor. Complies with standard EN60598-1 and other specific standards.

Moka ■ White □

FLUOTC-LEL T16 Interactive-Dali

W	Weight	Luminous Flux (lm)	Color	Code
2x55W	13.7Kg	9600lm	■	M163816
			□	M163826
4x24W	14Kg	7000lm	■	M163916
			□	M163926
6X24W	14Kg	10500lm	■	M164116
			□	M164126

850° **IP**20



Artemide

4x24W 7000 lm | 6x24W 10500 lm | 2x55W 9600 lm

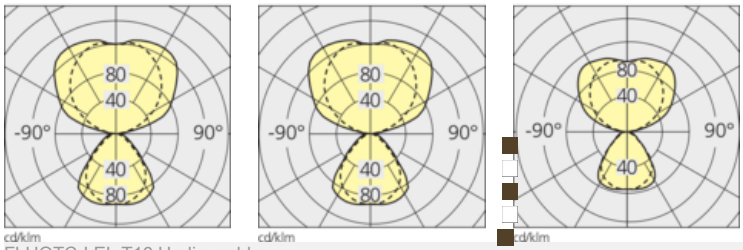

FLUOTC-LEL T16 Undimmable

W	Weight	Luminous Flux (lm)	Color	Code
2x55W	13.7Kg	9600lm		M163810
				M163820
4x24W	13.7Kg	7000lm		M163910
				M163920
6X24W	14Kg	10500lm		M164110
				M164120

850° IP20



4x24W 7000 lm | 6x24W 10500 lm | 2x55W 9600 lm

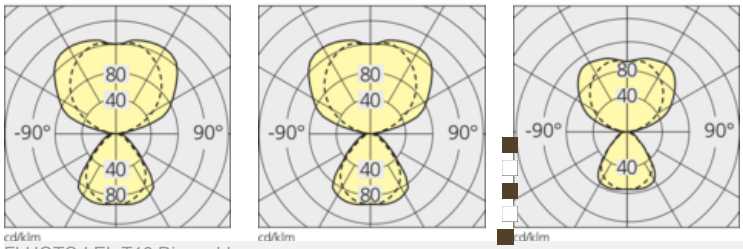

FLUOTC-LEL T16 Dimmable

W	Weight	Luminous Flux (lm)	Color	Code
2x55W	13.7Kg	9600lm		M163811
				M163821
4x24W	13.7Kg	7000lm		M163911
				M163921
6X24W	14Kg	10500lm		M164111
				M164121

850° IP20



4x24W 7000 lm | 6x24W 10500 lm | 2x55W 9600 lm

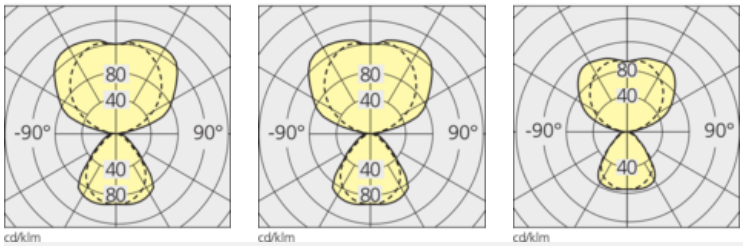

FLUOT16

Artemide

W	Weight	Luminous Flux (lm)	Color	Code
4x24W	13.7Kg	7000lm		M163919
				M163929
6X24W	14Kg	10500lm		M164119
				M164129



4x24W 7000 lm



6x24W 10500 lm



Accessories

		Code
	INTERACTIVE-DALI remote control.	M104900
	CHOCOLATE FLOOR - Polycarbonate dust protection screen (set of 2).	M164200

Designers

a.g Licht